



# TONS TF-5

## CUT RESISTANT GLOVE WITH FOAM NITRILE PALM COATING

From the TONS range, with very good mechanical resistance and excellent cut protection.

### FEATURES

- › Cut resistant: Level D (EN 388:2016)
- › Durable foam nitrile palm coating grips in dry, damp and light oily conditions
- › Excellent dexterity
- › Medium weight feel
- › Breathable materials
- › Knitwrist cuff style



### SUITABLE FOR


#### Typical Industries

- Automotive
- Construction
- Engineering
- Logistics
- Metal Fabrication and Handling
- Waste Management

#### Suitable Applications

- Handling Oily Components With Sharp Edges
- Injection Moulding
- Metal Fabrication
- Wiring

### CERTIFICATION

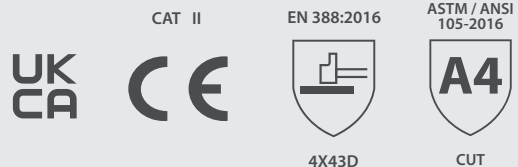

See overleaf for explanation





# TONS TF-5

## PRODUCT INFORMATION

<b>MATERIALS</b>	LINER:	13 gauge HPPE, glass fibre, nylon
	COATING:	Foam nitrile
<b>COLOUR</b>	Grey / Black	
<b>LENGTH (mm)</b>	250 (size dependent)	
<b>CUFF STYLE</b>	Elasticated knit wrist	

## ORDERING DETAILS

SIZE	CODE	PACKAGING
6/XS	TNS0500	10 pairs per bag 120 pairs per case
7/S	TNS0501	
8/M	TNS0502	
9/L	TNS0503	
10/XL	TNS0504	
11/XXL	TNS0505	


## RECOMMENDATIONS FOR USE

- **USE:** General handling glove with cut protection. Not suitable for thermal, electrical and chemical protection. Do not use near moving machines if there is a risk of entanglement
- **STORAGE:** Store in dry conditions in the original packaging and away from direct sunlight
- **CLEANING:** To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present.
- **LIFETIME:** Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use

## CERTIFICATION LEGENDS



### MECHANICAL HAZARDS EN 388:2016 PERFORMANCE LEVELS\*

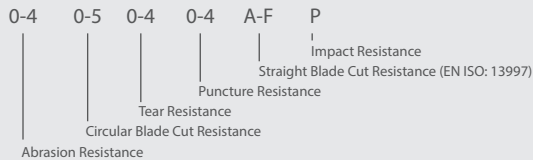

\*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter

### CLASSIFICATION FOR CUT RESISTANCE

Measured breakthrough time	Permeation performance index (grams)
A1	≥ 200
A2	≥ 500
A3	≥ 1000
A4	≥ 1500
A5	≥ 2200
A6	≥ 3000
A7	≥ 4000
A8	≥ 5000
A9	> 6000

### EUROPE

[www.globusgroup.com](http://www.globusgroup.com)

**E:** sales@globus.co.uk  
**T:** +44 (0)161 877 4747  
**F:** +44 (0)161 877 4746

### MIDDLE EAST AND AFRICA

[www.globusgroup.com/gcc](http://www.globusgroup.com/gcc)

**E:** gcc@globusgroup.com  
**T:** +971 4 882 9962  
**F:** +971 4 882 9963

### GLOBUS AMERICAS

[www.globusgroup.com](http://www.globusgroup.com)

**E:** americas@globusgroup.com



Globus Group, T2 Trafford Point, Twining Road, Trafford Park, Manchester, M17 1SH, UNITED KINGDOM  
 Globus EMEA FZE, Jafza One, Tower A, Office 2201, Jebel Ali, PO Box 61195, Dubai, UNITED ARAB EMIRATES  
 Globus Americas LLC, 45 Rockefeller Plaza, Suite 2000, New York City, New York, 10111, USA