

**PRECISION HANDLING WHEN OPEN FINGERTIP CONTACT IS REQUIRED**

Open digit glove for maximum dexterity

**FEATURES**

- › Cut resistant: Level A (EN 388:2016)
- › Three open fingers; index, thumb, middle finger
- › Comfortable combination of materials offers excellent work comfort
- › Reinforced on the palm and fingertips for added protection in key areas
- › Flexible
- › Velcro-fastening cuff for a secure fit



**SUITABLE FOR**

- |   |   |
|---|---|
| <p><b>Typical Industries</b></p> <ul style="list-style-type: none"> <li>▪ Automotive</li> <li>▪ Construction</li> <li>▪ Engineering</li> <li>▪ Manufacturing</li> </ul> | <p><b>Suitable Applications</b></p> <ul style="list-style-type: none"> <li>▪ Component Assembly</li> <li>▪ Electrical Tasks (non-live)</li> <li>▪ Intricate Mechanical Tasks</li> <li>▪ Light Engineering</li> <li>▪ Light Fabrication</li> </ul> |
|---|---|

**CERTIFICATION**

CAT II      EN 388:2016




4141A

*See overleaf for explanation*

### PRODUCT INFORMATION

MATERIALS	LINER:	Polyester, spandex, terry clothon thumb
	COATING:	Synthetic Leather/ Neoprene
COLOUR	Grey/Black/Yellow	
LENGTH (mm)	250 (size dependent)	
CUFF STYLE	Elasticated knit wrist	

### ORDERING DETAILS

SIZE	CODE	PACKAGING
7/S	SKY3901	10 pairs per pack 60 pairs per case
8/M	SKY3902	
9/L	SKY3903	
10/XL	SKY3904	
11/XXL	SKY3905	


### RECOMMENDATIONS FOR USE

- **USE:** General handling glove. Not suitable for thermal, electrical or chemical protection. Do not use near moving machines if there is a risk of entanglement
- **STORAGE:** Store in dry conditions in the original packaging and away from direct sunlight
- **CLEANING:** To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present.
- **LIFETIME:** Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use

### CERTIFICATION LEGENDS



MECHANICAL HAZARDS EN 388:2016  
PERFORMANCE LEVELS\*

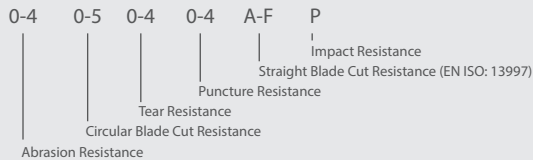

\*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter

#### EUROPE

[www.globusgroup.com](http://www.globusgroup.com)

**E:** [sales@globus.co.uk](mailto:sales@globus.co.uk)  
**T:** +44 (0)161 877 4747  
**F:** +44 (0)161 877 4746

#### MIDDLE EAST AND AFRICA

[www.globusgroup.com/gcc](http://www.globusgroup.com/gcc)

**E:** [gcc@globusgroup.com](mailto:gcc@globusgroup.com)  
**T:** +971 4 882 9962  
**F:** +971 4 882 9963

