

**MEDIUM WEIGHT PALM-COATED LATEX GLOVE WITH HIGH CUT PROTECTION**

Durable high cut resistance grip glove with thermal resistance up to 250°C for short contact. Great grip in wet and dry handling conditions.

**FEATURES**

- › Cut resistance: level F (EN388:2016) / ANSI A5
- › Durable 10g liner made of para-aramid and steel fibre to protect against high cut risks
- › Crinkle latex coating on palm and thumb that offers optimum wet and dry grip
- › Contact heat protection up to 250°C / 482°F for a short period (15 sec max)
- › Designed for easy movement and continuous wear
- › Seamless knit prevents irritation
- › Elasticated wrist provides a secure fit



**SUITABLE FOR**

**Typical Industries**

- Public utilities
- Automotive
- Construction
- Glass
- Steel and Metals
- Waste management


**Suitable Applications**

- Glass Handling
- Metal Fabrication
- Hazardous Recycling
- Paper Manufacturing
- Plastics Manufacturing
- Waste handling

**CERTIFICATION**

CAT II	EN 388:2016 + A1:2018	EN 407:2020	ASTM / ANSI 105-2016
		3X43F	X2XXXX
			A5
			CUT

See overleaf for explanation



# SKYTEC® | TORIN +™

## PRODUCT INFORMATION

MATERIALS	LINER:	10 gauge para-aramid, steel fibre, nylon
	COATING:	Latex
COLOUR	Yellow/Black/Blue	
LENGTH (mm)	250 (size dependent)	
CUFF STYLE	Elasticated knit wrist	

## ORDERING DETAILS

SIZE	CODE	PACKAGING
7/S	SKG00055DD	10 pairs per paper wrap 120 pairs per case
8/M	SKG00055DF	
9/L	SKG00055DH	
10/XL	SKG00055DJ	
11/XXL	SKG00055DL	


## RECOMMENDATIONS FOR USE

- **USE:** General handling glove with cut protection. Not suitable for high thermal (beyond 250C / 482F), electrical and chemical protection. Do not use near moving machines if there is a risk of entanglement
- **STORAGE:** Store in dry conditions in the original packaging and away from direct sunlight
- **CLEANING:** To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present.
- **LIFETIME:** Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use
- **WARNING:** Latex may cause allergies

## CERTIFICATION LEGENDS




MECHANICAL HAZARDS EN 388:2016 PERFORMANCE LEVELS\*

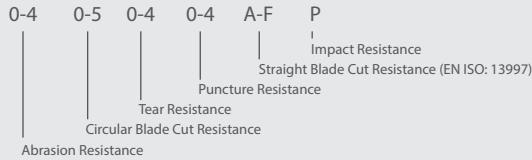

\*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter



HEAT AND FIRE EN 407

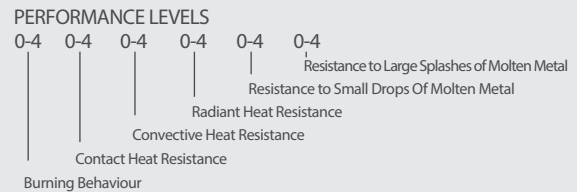

### CLASSIFICATION FOR CUT RESISTANCE

Measured breakthrough time	Permeation performance index (grams)
A1	≥ 200
A2	≥ 500
A3	≥ 1000
A4	≥ 1500
A5	≥ 2200
A6	≥ 3000
A7	≥ 4000
A8	≥ 5000
A9	> 6000

### EUROPE

[www.globusgroup.com](http://www.globusgroup.com)

**E:** [sales@globus.co.uk](mailto:sales@globus.co.uk)  
**T:** +44 (0)161 877 4747  
**F:** +44 (0)161 877 4746

### MIDDLE EAST AND AFRICA

[www.globusgroup.com/gcc](http://www.globusgroup.com/gcc)

**E:** [gcc@globusgroup.com](mailto:gcc@globusgroup.com)  
**T:** +971 4 882 9962  
**F:** +971 4 882 9963

### GLOBUS AMERICAS

[www.globusgroup.com](http://www.globusgroup.com)

**E:** [americas@globusgroup.com](mailto:americas@globusgroup.com)



Globus Group, T2 Trafford Point, Twining Road, Trafford Park, Manchester, M17 1SH, UNITED KINGDOM  
 Globus EMEA FZE, Jafza One, Tower A, Office 2201, Jebel Ali, PO Box 61195, Dubai, UNITED ARAB EMIRATES  
 Globus Americas LLC, 45 Rockefeller Plaza, Suite 2000, New York City, New York, 10111, USA

©2023 Globus (Shetland) Ltd | SKY-DATA-TORIN+0123\_2

EUType-Examination Certificate issued by CCQS Certification Services Limited, Block 1 Blanchardstown Corporate Park, Ballycoolin Road, Blanchardstown, Dublin, D15 AKK1, Ireland (Notified Body No 2834)  
 UKCA Type-Examination Certificate issued by CCQS UK Ltd, 25 Wilton Rd, Pimlico, London SW1V 1LW, United Kingdom. [UK Approved Body No. 1105].

The descriptions, characteristics, applications and photos are given for information purposes and do not constitute a contractual commitment. The manufacturer reserves the right to make any modifications it deems necessary.