



## LIGHTWEIGHT SOLVENT FREE LATEX GRIP GLOVE WITH RECYCLED POLYESTER LINER

Unique patterned latex grip glove with 90% rPET liner offering outstanding grip properties in dry and wet conditions.

### FEATURES

- ▶ Lightweight 90% rPET liner (90%) maintains a superthin 'feel' for improved dexterity, fit and comfort
- ▶ Special suction cups pattern which leads to an excellent wet and dry grip
- ▶ Solvent free latex coating which makes it more Eco friendly compared to a crinkle latex glove
- ▶ 19g of CO<sub>2</sub> reduced vs an equivalent crinkle latex glove with nylon liner.
- ▶ RCS (Recycled Claim Standard) certified
- ▶ Anatomically designed for high levels of comfort and tactile touch
- ▶ Contact heat protection up to 100°C for a short period (15 sec max)
- ▶ Elasticated wrist provides a secure fit
- ▶ 1 pair = 1 500ml (PET) plastic bottle, recycled



### SUITABLE FOR

#### Typical Industries

- Construction
- Engineering
- Logistics
- Municipal Services
- Transport

#### Suitable Applications

- Assembly
- Final Fix
- Light Engineering
- Precision Operations

### CERTIFICATION

|        |                       |             |                      |          |
|--------|-----------------------|-------------|----------------------|----------|
| CAT II | EN 388:2016 + A1:2018 | EN 407:2020 | ASTM / ANSI 105-2016 | ANSI     |
|        |                       |             |                      |          |
|        |                       | 2131A       | X1XXXX               | A1       |
|        |                       |             |                      | 3        |
|        |                       |             | CUT                  | ABRASION |

See overleaf for explanation



## PRODUCT INFORMATION

|             |                        |  |
|-------------|------------------------|--|
| MATERIALS   | LINER:                 | 15 gauge 90% recycled polyester (rPET) |
|             | COATING:               | Natural Latex                          |
| COLOUR      | Green                  |  |
| LENGTH (mm) | 250 (size dependent)   |  |
| CUFF STYLE  | Elasticated knit wrist |  |

## RECOMMENDATIONS FOR USE

- USE: General handling glove. Not suitable for thermal up to 100°C, electrical or chemical protection. Do not use near moving machines if there is a risk of entanglement
- STORAGE: Store in dry conditions in the original packaging and away from direct sunlight
- CLEANING: To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present.
- LIFETIME: Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use
- WARNING: Latex may cause allergies


## ORDERING DETAILS

| SIZE   | CODE       | PACKAGING               |
|--------|------------|-------------------------|
| 7/S    | SKG00051ED | 10 pairs per paper wrap |
| 8/M    | SKG00051EF |                         |
| 9/L    | SKG00051EH |                         |
| 10/XL  | SKG00051EJ | 120 pairs per case      |
| 11/XXL | SKG00051EL |                         |

## CERTIFICATION LEGENDS



### MECHANICAL HAZARDS EN 388:2016 PERFORMANCE LEVELS\*

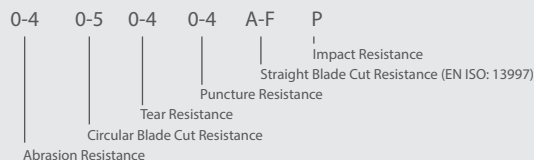


\*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter



### HEAT AND FIRE EN 407

#### PERFORMANCE LEVELS

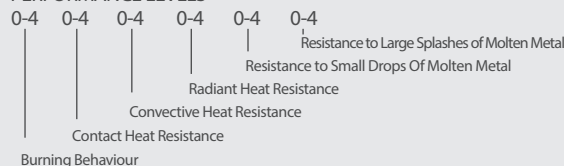

#### CLASSIFICATION FOR CUT RESISTANCE

| Measured breakthrough time | Permeation performance index (grams) |
|----------------------------|--------------------------------------|
| A1                         | ≥ 200                                |
| A2                         | ≥ 500                                |
| A3                         | ≥ 1000                               |
| A4                         | ≥ 1500                               |
| A5                         | ≥ 2200                               |
| A6                         | ≥ 3000                               |
| A7                         | ≥ 4000                               |
| A8                         | ≥ 5000                               |
| A9                         | > 6000                               |

#### ANSI/ISEA 105-2016 ABRASION RATING CHART

| Abrasion Level Rating   | 0    | 1    | 2    | 3      | 4      | 5       | 6       |
|-------------------------|------|------|------|--------|--------|---------|---------|
| Gram Load               | 500  | 500  | 500  | 500    | 1000   | 1000    | 1000    |
| Abrasion Cycles to Fail | <100 | ≥100 | ≥500 | ≥1,000 | ≥3,000 | ≥10,000 | ≥20,000 |

## GLOBUS

### EUROPE

[www.globusgroup.com](http://www.globusgroup.com)

E: [sales@globus.co.uk](mailto:sales@globus.co.uk)

T: +44 (0)161 877 4747

F: +44 (0)161 877 4746

### MIDDLE EAST AND AFRICA

[www.globusgroup.com/gcc](http://www.globusgroup.com/gcc)

E: [gcc@globusgroup.com](mailto:gcc@globusgroup.com)

T: +971 4 882 9962

F: +971 4 882 9963

### GLOBUS AMERICAS

[www.globusgroup.com](http://www.globusgroup.com)

E: [americas@globusgroup.com](mailto:americas@globusgroup.com)

Globus Group, T2 Trafford Point, Twining Road, Trafford Park, Manchester, M17 1SH, UNITED KINGDOM  
 Globus EMEA FZE, Jafza One, Tower A, Office 2201, Jebel Ali, PO Box 61195, Dubai, UNITED ARAB EMIRATES  
 Globus Americas LLC, 45 Rockefeller Plaza, Suite 2000, New York City, New York, 10111, USA

© 2023 Globus (Shetland) Ltd | SKY-DATA-ECO-COPPER-0623\_1

EU Type-Examination Certificate issued by SATRA Technology Europe Limited, Bracetown Business Park, Clonee, D15YN2P, Republic of Ireland. (Notified Body No. 2777)  
 UKCA Type-Examination Certificate issued by SATRA Technology Centre Ltd, Wyndham Way, Telford Way, Kettering, Northamptonshire, NN16 8SD, United Kingdom (Approved Body No. 0321)

The descriptions, characteristics, applications and photos are given for information purposes and do not constitute a contractual commitment. The manufacturer reserves the right to make any modifications it deems necessary.